

DUICK START USER GUIDE



C-00170 KRONOS 1/8TH SCALE YWD ELECTRIC READY TO RUN

www.corally.com

INTRODUCTION

Thank you for purchasing a Team Corally car. This manual describes the instructions for using the model and the electronic components. You will also find some tips on how to maintain your RC model so that you can enjoy it for years to come. You have purchased one of the most efficient models available on the market that has been designed by a team of professionals. You will also benefit from the best after-sales support. All Team Corally models guarantee a high quality of manufacture and performance that guarantees you a high satisfaction of use and services provided by the Team Corally. Always take the time to read the instructions carefully in order to follow all the procedures to use your RC model safely for you and for other people and property in the area. This will allow you to take full advantage of all the performance of your RC model.

Please also check the website www. corally.com/Downloads/ to check if you have the latest version of this instruction manual. (Version: see bottom cover of this manual)

If you have any questions about the model and its components, you can send a message to info@corally.com We also recommend that you get help from an experienced model maker or your dealer.

You will find all the references of the spare parts on the website www.corally.com

TERM OF USE

The user is responsible for the use of your model. The user assumes all risks associated with the use of the model. This model is not intended for use by children under 14 years of age without the supervision of a responsible adult who is familiar with the dangers of using a RC model. Team Corally / JSP Group Intl bvba, its manufacturers, distributors and resellers cannot control the use and load of the model and therefore cannot be held responsible for any damage to property and damage caused to persons resulting from the use of this product. You must accept these conditions and consider yourself fully responsible for the use of this product. If not, do not use this product.

Due to the continuous development of our products, the exact specifications of the kit may vary. If you have a problem with your new kit, please contact the store where you purchased it, indicating the part number(s). Team Corally / JSP Group Intl byba reserves the right to change any specification without notice. All rights reserved.

READ FIRST

This owner's manual is designed for use with your vehicle and contains the instructions you will need to operate and maintain your vehicle.

- We know you want to start driving immediately after unpacking, but it is very important that you take the time to read this manual carefully, even if you are an experienced R/C driver.
- Read carefully and follow all instructions in this manual. Failure to comply with the instructions will be considered as abuse and/or negligence which may result in the cancellation of the warranty.
- Your vehicle is designed to operate on uneven terrain. However, dust, sand, water and carpet fibres can get into your car's workspaces and can damage your vehicle if they are not removed quickly. We do not guarantee any warranty on your vehicle against damage caused by external elements such as sand, dirt or water. Users are responsible for the maintenance and safe operation of this vehicle.
- This product is not a toy. It is not suitable for users under 14 years of age, unless they are supervised by adults.
- Never attempt to disassemble electronic components. These have been carefully calibrated at the factory.
- Only improve your car with parts made for your car. If you upgrade performance, replace the entire system (such as the motor, inverter, battery, etc.) so that all components are properly adapted. Any malfunction resulting from a custom modification will void your warranty.
- Before driving your vehicle, please read this manual in its entirety and examine your vehicle and radio control system for any defects.
- For better performance, some adjustments may be necessary.
- This vehicle requires a battery (included in the car or in the packaging). Make sure the vehicle's battery is sufficiently charged before driving, otherwise you may lose control of the vehicle.
- The radio transmitter requires 4 AA batteries (not included)
- Always remove or disconnect the battery from the vehicle to the inverter when not in use.
- Please drive your car in a spacious place. Never drive your car on the street or in traffic. Public places are subject to specific legislation by country, city, municipality, please comply with the legislation for the use of RC models in your region.
- This product is fully assembled in the factory. We accept no liability for damage and/or accidents resulting from custom modifications and/or malfunctions.



USE PRECAUTIONS

Failure to operate your model in a safe and responsible manner may result in injury to yourself, others or damage to property around you.

- Do not use your model on public roads or in areas where you may encounter pedestrians or riders.
- Do not operate in a congested area or in crowds.
- Do not operate in areas where loud noises can disturb others, such as hospitals and residential areas.
- Do not operate your model with obstructed line of sight, at night or near water.
- Your model is radio controlled, it is subject to possible radio interference. Radio interference can cause loss of control of your model. Be careful.
- Take care not to injure yourself while using tools to adjust or upgrade your model.
- Since the model contains small parts, keep out of reach of children while assembling and/or disassembling your model.
- If your model becomes stuck against an object, release the throttle and retrieve it by hand
- Do not continue to apply the throttle when your model is stuck. This may damage the motor and/or ESC/Receiver unit.
- Turn OFF your model and don't use it if it runs erratically. Please do not use your model again until the problem has been solved.
- Keep the wheels of the model off the ground when checking the operation of the radio equipment.
- When learning to operate your model, go to an area that has no obstacles that can damage your model.
- Before and after each use, check all the screws on the model.
- To maintain the best performance, check that all moving parts move freely.

Take all necessary precautions before, during and after using your model. You are responsible for the safe assembly, maintenance and use of your model.

In case of any questions, contact your local reseller or contact Team Corally support for assistance.







SAFETY PRECAUTIONS

For your safety, always use wear gloves and goggles when assembling and maintaining your model.

Always take all necessary precautions when handling products (silicone oil, grease, thread lock, cyanolyte glue, fuel) for the operation of the model. (Refer to the manufacturer's instructions)

For your safety, to keep the warranty and obtain the best performance, always use original CORALLY genuine parts.

Contains: LEAD (CAS 7439-92-1) ANTIMONY (CAS 7440-36-0)

WARNING: This product contains a chemical known to the state of California to cause cancer and birth defects or other reproductive harm.

CAUTION: CANCER HAZARD

Contains lead, a listed carcinogen. Lead is harmful if ingested. Wash thoroughly after using.

DO NOT use product while eating, drinking or smoking.

WARRANTY

If material defects or manufacturing faults should arise in a product distributed or manufactured by Team Corally / JSP Group Intl bvba, and purchased by a consumer, we Team Corally / JSP Group Intl bvba acknowledge the obligation to correct those faults or defects within the limitations described below. This manufacturers warranty is in addition to, and does not affect, the legal or contractual rights of the consumer which arise from the purchase of such products. Team Corally / JSP Group Intl bvba guarantees the consumer that its products are free from material, manufacturing, and construction faults, as determined by the general state of knowledge and technology valid at the time of manufacturing. The fault responsible for causing the damage must be proven to have been present in the product at this time. Claims for compensation arising from consequential damage or product liability will not be considered valid unless they fall under peremptory provisions of the law. If material defects or manufacturing faults should arise in a product distributed or manufactured by Team Corally / JSP Group Intl bvba in the European community (EC) and purchased by a consumer, then Team Corally / JSP Group Intl bvba undertakes to correct those defects within the limitations described below. This manufacturer's declaration does not affect the consumer's legal or contractual rights regarding defects arising from the purchase contract between the consumer and the dealer or reseller. Extend of the Warranty

If a claim is made under warranty, we take at our discretion to repair or replace the defective goods. We will not consider supplementary claims, especially for reimbursement of costs relating to the defect (e;g. installation / removal costs) and compensation for consequent damages unless they are allowed by statute. This does not affect claims on legal regulations, especially according to the product liability law.

Provisions of the Warranty

The purchaser is required to make the warranty claim in writing, and must enclose original proof of purchase (e.g. invoice, receipt, delivery note) and the appropriate warranty card. He must send the defective goods to our local representatives or directly to Team Corally / JSP Group Intl bvba, Geelseweg 80, 2250 Olen, Belgium at his own risk and cost.

The purchaser should state the material defect or manufacturing fault, or symptoms of the fault, as accurate as possible, so that we can check if our warranty obligation is applicable. The goods are transported from the consumer to us, and from us to the consumer, entirely at the risk and cost of the consumer.

Invalidation of the Warranty

The consumer cannot make a claim under warranty when the fault is affecting the use of the product arising from natural wear, competition use, or improper use (including installation) or external forces. The consumer's adherence to the building and operating instructions relevant to the model, including the installation, operation, use of, and maintenance of, model-related components cannot be supervised by Team Corally / JSP Group Intl bvba. Therefore Team Corally / JSP Group Intl bvba is in no way liable for loss, damage, or costs resulting from improper use, or behaviour in any way connected to the above described provisions. Unless otherwise required by law, Team Corally / JSP Group Intl bvba is in no way whatever liable to provide compensation for damages arising from the improper use of the model (including personal injury, death, damage to buildings, loss of turnover, loss of business, or interruption of business, or any other direct, or indirectly caused, consequential damage).

Duration of Validity

The claim period is 24 months from the date of purchase of the product by the consumer from a dealer in the European Community (EC) counted from the date of purchase. The claim period is 12 months from the date of purchase of the product by the consumer from a dealer outside the European Community (EC) counted from the date of purchase. If a defect arises after the end of the claim period, or if evidence or documents required according to this declaration in order to make the claim valid are not presented until after this period, then the consumer forfeits any rights or claims from this declaration. The guarantee period is not prolonged by the granting of any claims within the framework of this warranty, especially in the case of repair or replacement. The guarantee period also does not restart in such cases.

Warranty Expiration

If we do not acknowledge the validity of a claim based on this declaration within the claim period, all claims based on this declaration will expire after six months from the time of registering the claim; however this cannot occur prior to the end of the claim period.


For any support, you can contact us by email at info@corally.com




LIPO BATTERY SAFETY PRECAUTIONS


- Follow and respect the manufacturer's instructions for use
- It is important to check that your ESC is set to LIPO if you are using a LIPO battery. Failure to comply with this instruction will result in increased battery discharge and may cause fire and damage to persons and property.
- When charging or storing LiPo batteries always use LiPo Safety Bag (Flame retardant).
- Always respect the maximum rate and voltage specified by the battery manufacturer.
- Charge the LIPO battery outdoors or in a ventilated area away from flammable objects and surfaces.
- NEVER leave your LiPo battery unattended while charging.
- If the battery swells during charging, stop charging immediately and disconnect the battery from the charger. Leave the battery outside for a few hours and observe. Then recycle the battery according to the instructions of your country/region. Never dispose of a LIPO battery with domestic waste.
- Before recycling your defective battery, it must be neutralized. Take a plastic container, fill it with water and add a lot of salt until the water becomes opaque. Place the LIPO battery in the water and leave for 24 hours. Check with a voltmeter that the voltage is 0.0V. Then recycle the battery according to local regulations.
- Never charge a damaged or inflated battery.
- Never discharge the battery cells below 3.2V.
- Always use the appropriate balancer/charger when charging your LiPo battery pack.
- When the battery is empty, check the temperature of the battery before charging it. If the battery is very hot, wait until it cools before charging it.
- Never charge a very hot battery as this may cause an explosion or fire.
- When the battery is empty, recharge it immediately. Do not store an empty battery, the battery will continue to discharge, it will fall below the minimum voltage and become unusable.

KIT CONTENT (Depends on the selected model)

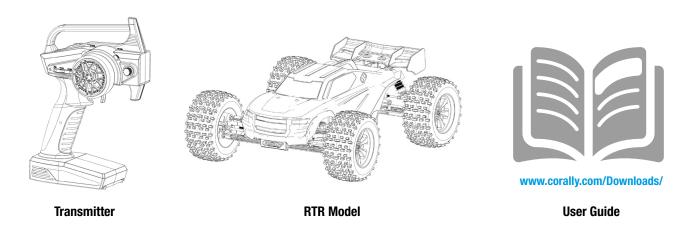


REQUIRED FOR OPERATION (Not included)

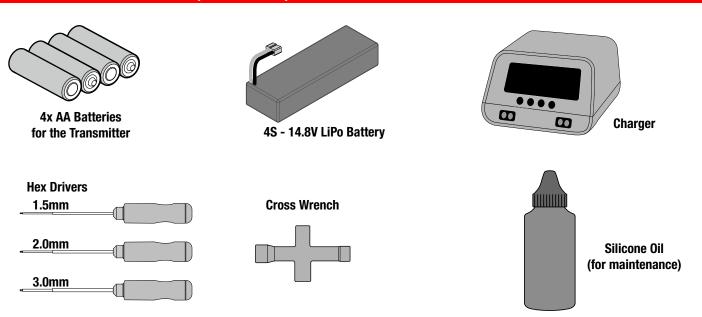


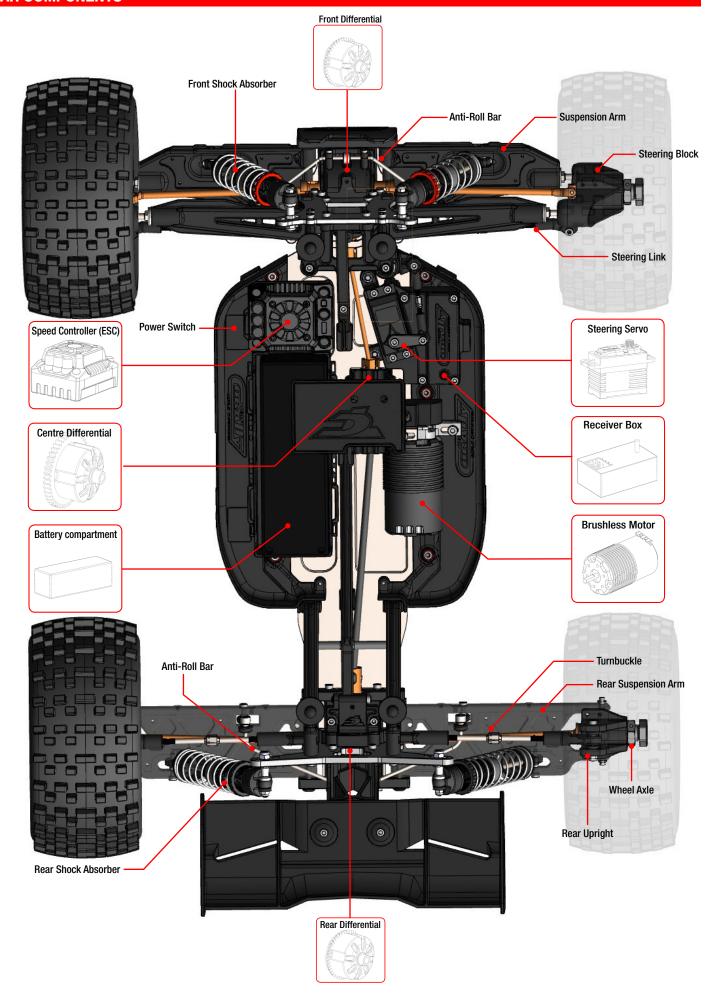






QUICK START GUIDE

































FRONT TOE






Adjust the angle by screwing the TURNBUCKLE.

FRONT CAMBER

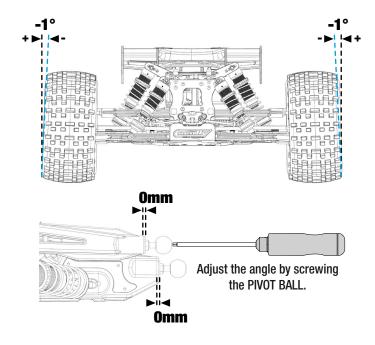



REAR CAMBER

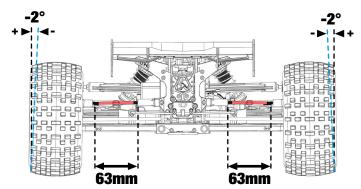

Adjust the angle by screwing the TURNBUCKLE.

FRONT CASTER






To change the Caster Angle, move the Upper Suspension Arm forward or backward using the different CASTER CLIPS sizes.



SUSPENSION TRAVEL

It is important to properly adjust the travel of the suspension arm to prevent the shock absorber from reaching the end of its travel and damaging it.


- Place the chassis on a block in order to release the suspension to the maximum.
- Measure the distance between the 2 fixing points of the shock absorber.
- If necessary adjust the FR & RE suspension travel by screwing the set screw on the FR & RE lower suspension arm.

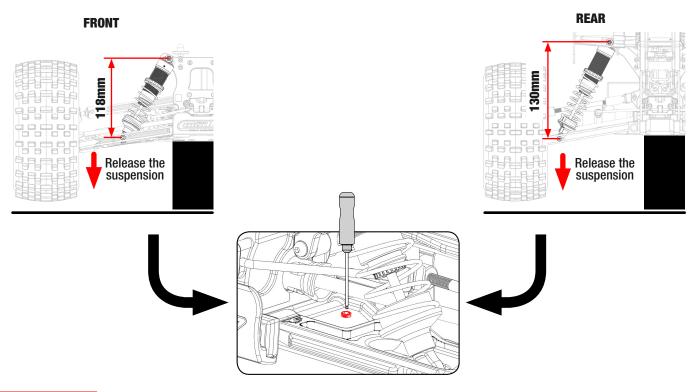

RIDE HEIGHT


To achieve the correct ground clearance setting, follow the instructions below.


- Lift the car by ±30cm and drop the car on the floor.
- The front and rear suspension arms should be ± parallel to the ground. (Neutral setup)
- Adjust the tension of the shock absorber spring according to the type of terrain.

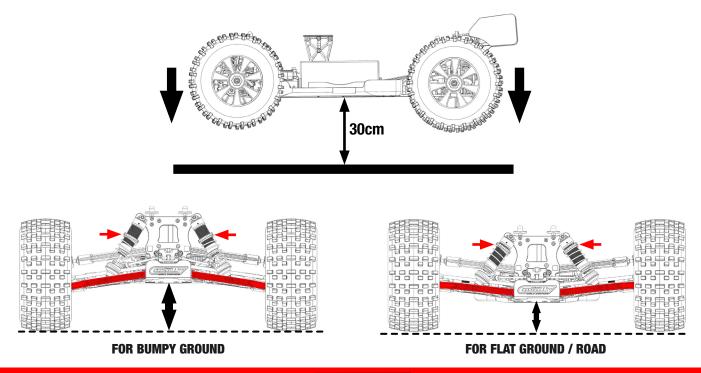


SHOCK ABSORBER MAINTENANCE

It may be necessary to replace the silicone oil in the shock absorbers every 40 runs. It depends on how you drive and the type of terrain you drive on.







Remove the shock cap.



Drain the oil from the shock absorber.

FILL THE SHOCK ABSORBERS WITH NEW SILICONE OIL ALWAYS USE SILICONE OIL, NEVER USE ANY OTHER TYPES OF OIL. **FILL MOVE TIGHTEN MOVE TIGHTEN** 50% • Pull the Shock shaft Move the piston up&down • Pull the Shock shaft • Install the silicone mem- Gently move the piston · Allow the piston in the (3-4x) to release the air down. brane in the shock cap. in upper position. upper position.

| | FRO | ONT | RE | | |
|-----------|--------------|----------------|--------------|----------------|----------------|
| | SILICONE OIL | SPRING TENSION | SILICONE OIL | SPRING TENSION | SHOCK PISTON |
| TRACK USE | 450CPS | 4mm | 400CPS | 0mm | 6 Holes Ø1.3mm |
| OFF-ROAD | 600CPS | 4mm | 500CPS | 0mm | 6 Holes Ø1.3mm |
| BASHING | 650CPS | 4mm | 550CPS | 0mm | 6 Holes Ø1.3mm |

• Tighten slightly the

body.

shock cap on the shock

• A little oil will flow out of

the shock absorber.

• The excess will flow out

of the shock absorber.

• Tighten the cap fully but

not too much otherwise

the membrane will be

deformed.

· Install the shock absorb-

er vertically and let it sit

for a few minutes until

the bubbles rise to the

surface.

.www. corally.com/Chemicals/Silicone-Oils/

• Fill the shock body with


silicone oil.

• Front : 450cps


Rear: 400cps

bubbles in the silicone

oil.






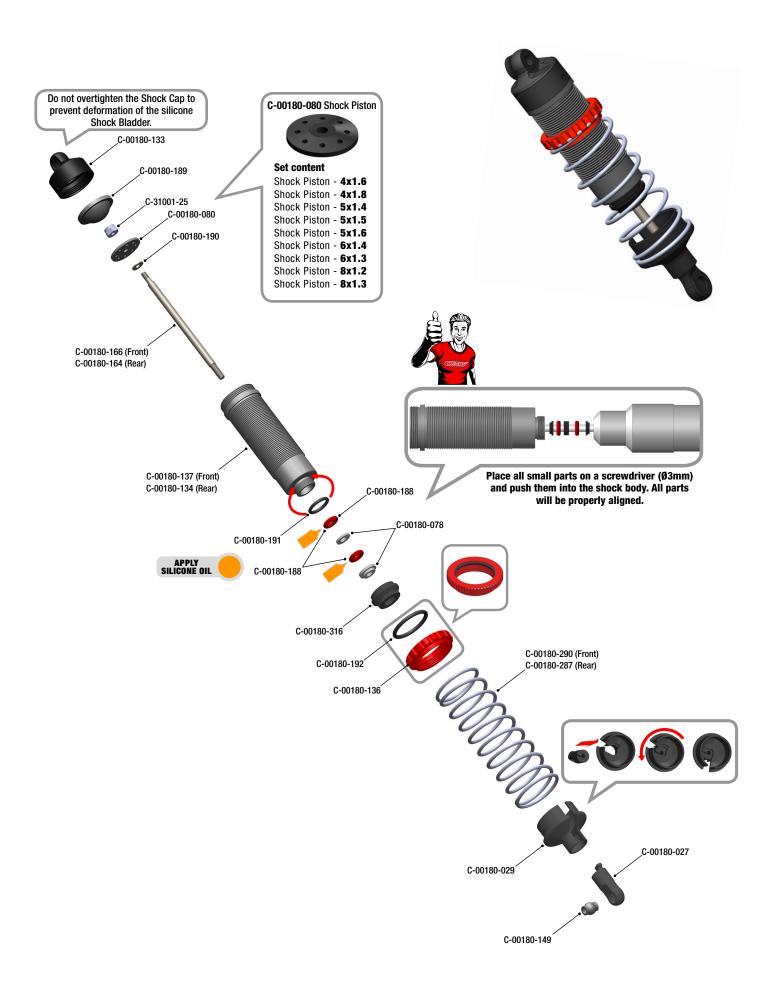

DIFFERENTIAL MAINTENANCE

It may be necessary to replace the silicone oil every 50 runs. It depends on how you drive and the type of terrain you drive on.

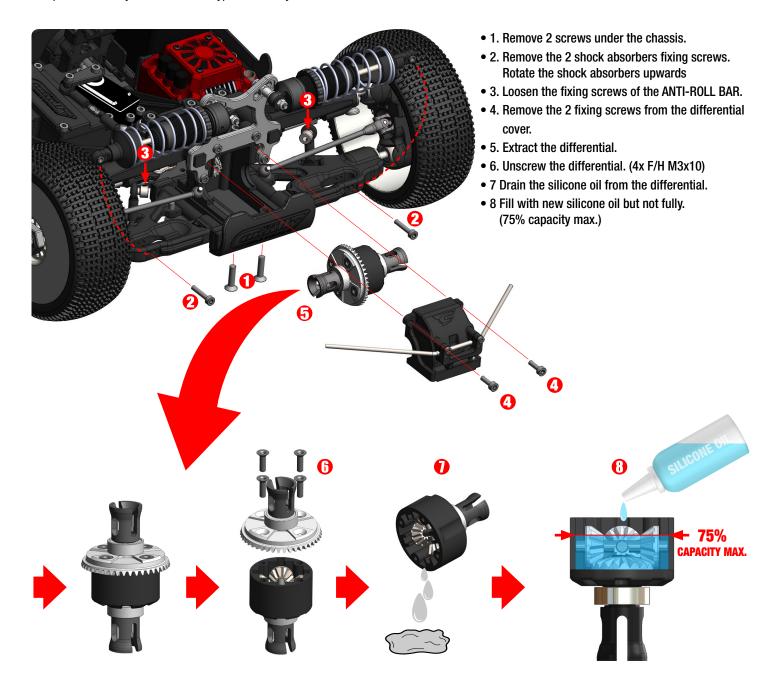

Perform the same maintenance operations for the centre and rear differentials.




Use the correct grade of silicone oil according to the operation. Use only Silicone Oil, never use any other types of oil.

| | FRONT DIFF | CENTRE DIFF | REAR DIFF |
|-----------|------------|---------------|-----------------|
| TRACK USE | 7500cps | 15.000cps | 5000 cps |
| OFF-ROAD | 10.000cps | 30.000cps | 7500 cps |
| BASHING | 20.000cps | 50>100.000cps | 10.000cps |


www. corally.com/Chemicals/Silicone-Oils/



FRONT & REAR DIFFERENTIAL - EXPLODED VIEW

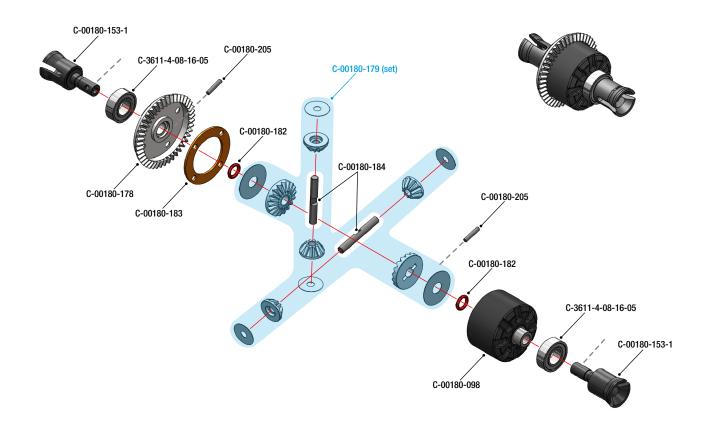

CENTRE DIFFERENTIAL - EXPLODED VIEW

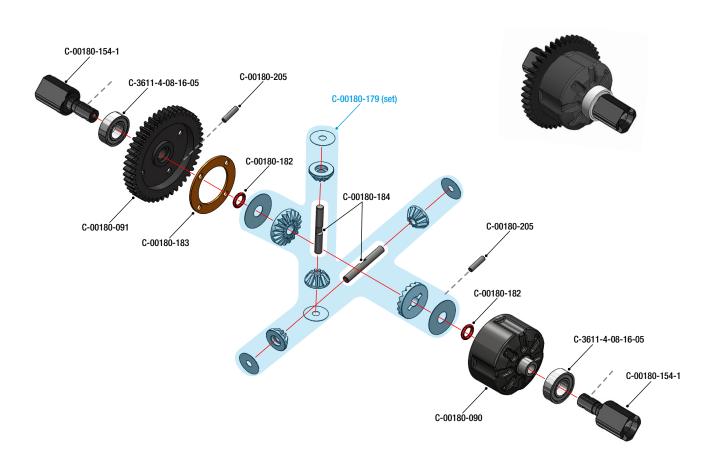

MOTOR PINION MOD1.0

High-performance 13T tooth pinion gear, manufactured from special steel for toughness and durability with precise tolerances and assures unparalleled concentricity. Created on a special gear machine, all pinions feature ultra-precise tooth shaping and ultra-true running for vibration-free operation. Each pinion is marked with the tooth number for easy and quick identification.





- Special hardened steel
- · CNC cut teeth for perfect teeth shape and concentricity
- Module MOD1
- fits all cars with MOD1 gears (1/8 Scale)
- for 5.0mm motor shafts


www.corally.com/Pinions-Gears/Pinions-MOD1/


| Motor Pinion | 11 T C-72711 | 12 T C-72712 | 13 T C-72713 | 14 T C-72714 | 15 T C-72715 | 16 T C-72716 | 17 T C-72717 | 18 T C-72718 | 19 T C-72719 | 20 T C-72720 | 21 T C-72721 | 22 T C-72722 | 23 T C-72723 |
|-----------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Spur Gear | 46T |
| 3,08 | 12,87 | 11,79 | 10,89 | 10,11 | 9,44 | 8,85 | 8,33 | 7,86 | 7,45 | 7,08 | 6,74 | 6,43 | 6,15 |
| | Optional | Optional | Standard Fitted | Not Suitable |
| | +TORQUE | | +SPEED | | | | | | | | | | |

GEAR MESH ADJUSTMENT

If the gear mesh is not correct, you wear out the spur gear prematurely, the transmission will make noise, give unnecessary load on the motor (higher consumption, heating of the transmission).










- 1. Loosen the screws.
- 2. Insert the paper strip.
- 3. Push the motor against the spur gear.
- 4. Turn the spur gear to run the paper through the teeth.
 - Stop when the paper is in the middle. Make sure that the motor pinion is against the spur gear.
- 5. Tighten the fixing screws.



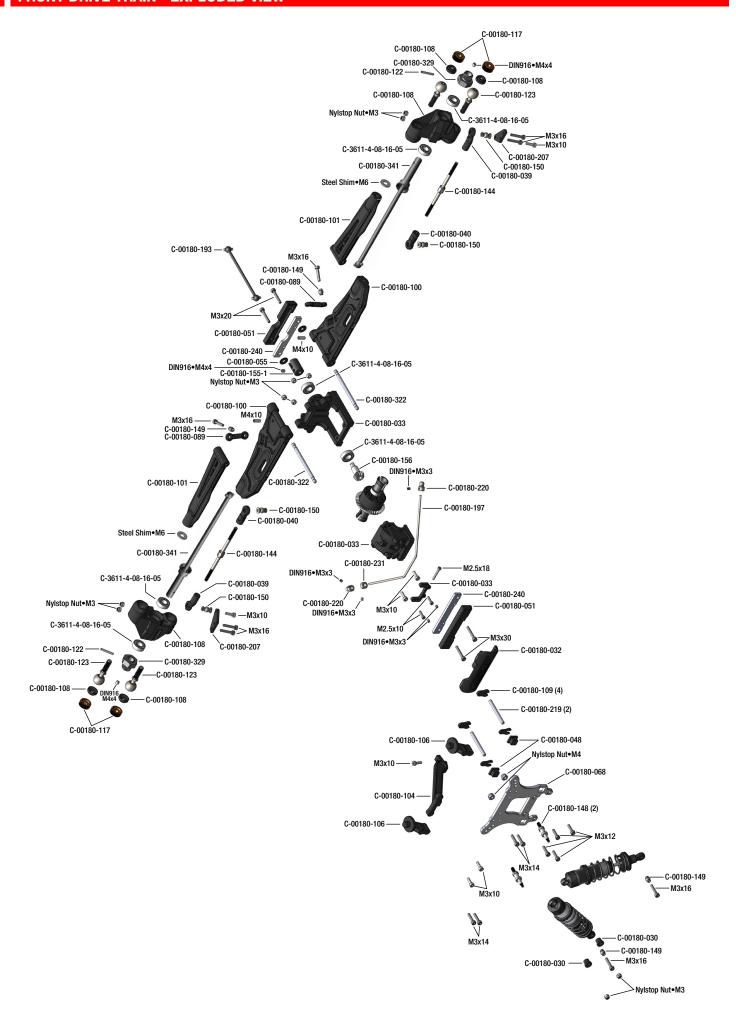



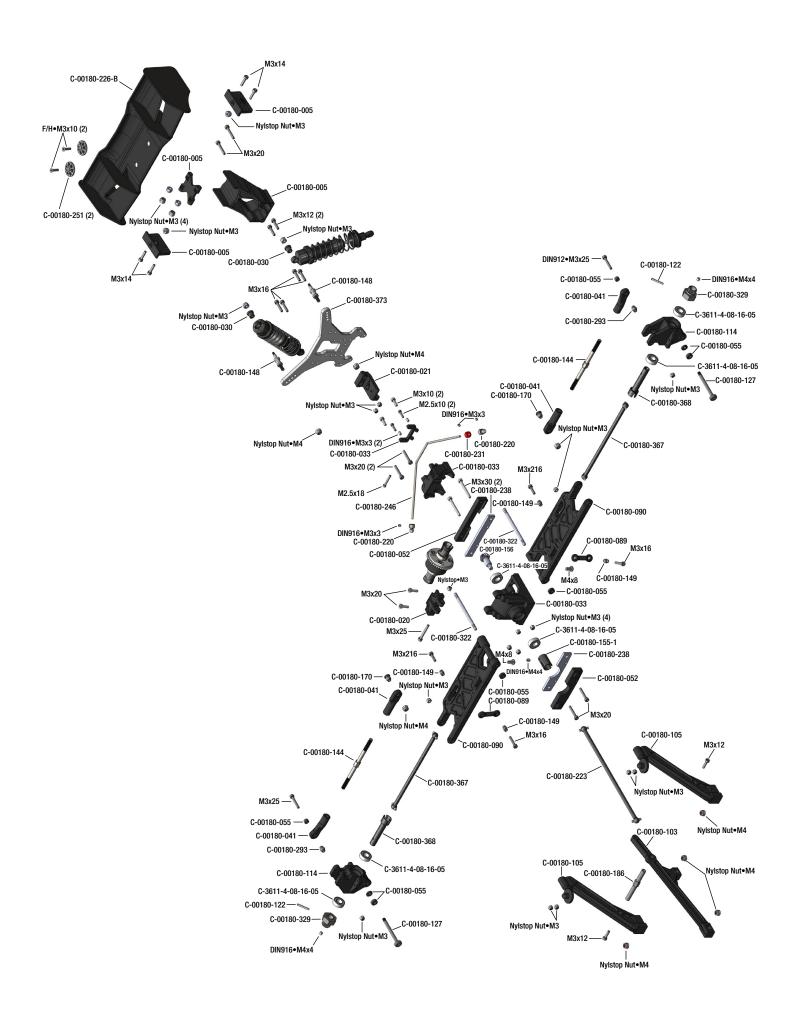

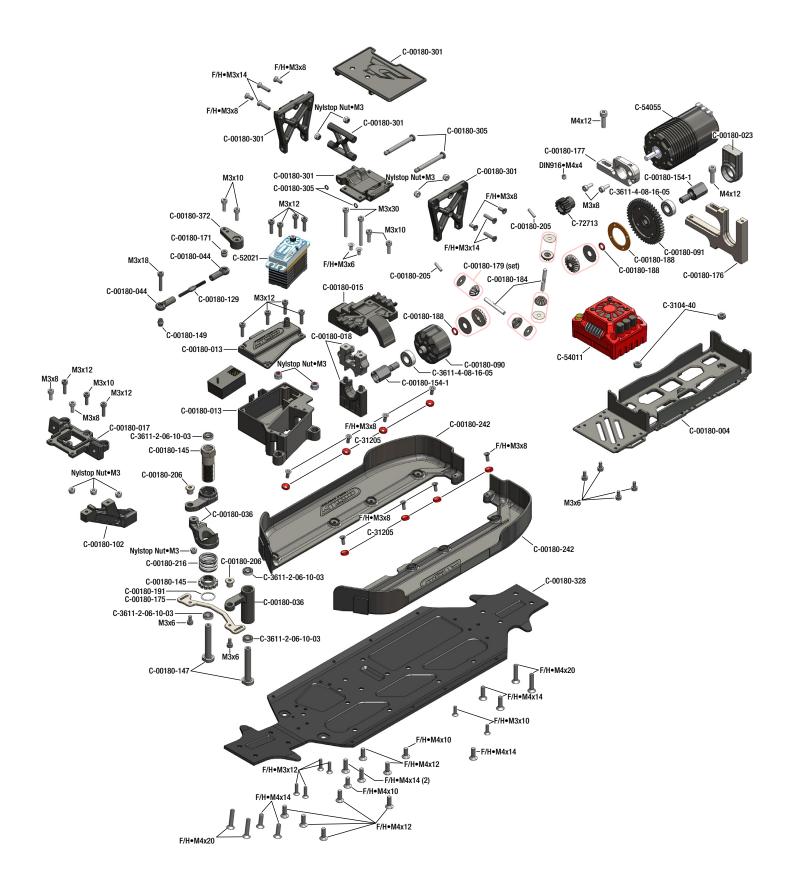





C-00180-004 Battery - ESC Tray - Composite - 1 pc



C-00180-005 Wing Mount - Adjustable -Composite - 1 Set



C-00180-013 Servo Mount - Receiver Box -Composite - 1 Set



C-00180-015 Center Diff Plate - Spur Gear Cover - Composite - 1 pc



C-00180-017 Arm Holder - Steering Deck -Composite - 1 pc



C-00180-018 Center Diff Bulkhead - Composite - 1 Set



C-00180-020 Gearbox Brace Mount A - Rear -Composite - 1 pc



C-00180-021 Gearbox Brace Mount Stiffener - Composite - 1 pc



C-00180-023 Motor Mount Center Diff Insert -Composite - 1 pc



C-00180-027 Body Post - Composite - 2 pcs



C-00180-029 Shock Spring Cup - Composite - 4 pcs



C-00180-030 Shock Bushing - Composite -



C-00180-032 Bumper - Front - Rear - Composite - 1 set



C-00180-033 Bumper - Front - Rear - Composite - 1 set



C-00180-036 Steering Bellcrank - Parts A-B-C - Composite - 1 Set



C-00180-039 Steering Ball Cups - Composite - 1 set



C-00180-041 Rear Camber Ball Cups - Outer - Inner - 1 set



C-00180-044 Ball Joint 6mm - Composite -2 pcs



C-00180-048 Bushings Set - 0 Deg -Composite - 1 Set



C-00180-051 Suspension Arm Mount - Front -Composite - 1 Set




C-00180-052 Suspension Arm Mount - Rear -Composite - 1 Set



C-00180-055 Suspension Arm Shim - Composite - 1 Set



C-00180-078 Shock Body Insert - Washer -Composite - 1 set



C-00180-080 Shock Piston - Composite - 9 versions - 4 pcs/type



C-00180-089 Anti-Roll Bar Ball Cups - Composite - 4 pcs



C-00180-090 Diff Case - Center - Composite - 1 pc



C-00180-091 Spur Gear 46T - Steel - 1 pc



C-00180-098 Diff Case - FR-RE - Composite - 1 pc



C-00180-99 Suspension Arm Long - Lower -Rear - Composite - 1 pc



C-00180-100 Suspension Arm Long - Lower -Front - Composite - 1 pc



C-00180-101 Suspension Arm Long - Upper -Front - Composite - 1 pc



C-00180-102 Chassis Brace - Front - Composite - 1 pc



C-00180-103 Chassis Brace - Rear - Composite - 1 pc



C-00180-104 Shock Tower Brace - Front -Composite - 1 pc




C-00180-105 Shock Tower Brace - Body Mount - Rear - Composite - 2 pcs





C-00180-108 Steering Block Wide - Pivot Ball Cup (2) - Front - Composite - 1 set




C-00180-109 Caster Clips Set - 1 to 4.5mm - 1 Set



C-00180-114 Composite Rear Upright - Wide - 1 pc



C-00180-117 Pivot Ball Adjusting Nut - Aluminium - 4 pcs



C-00180-122 Pin 2.5x17mm - Steel - 10 pcs



C-00180-123 Pivot Ball - Steel - 4 pcs



C-00180-127 Hinge Pin - Outer - Steel - 2 pcs



C-00180-129 Turnbuckle - M3 - 35mm -Steel - 2 pcs



C-00180-133 Shock Cap - Aluminium - Hard Anodised - 2 pcs



C-00180-134 Shock Body - Rear - Aluminium - Hard Anodised - 1 pc



C-00180-136 Shock Collar - Aluminium -Hard Anodised - 2 pcs



C-00180-137 Shock Body - Front - Aluminium - Hard Anodised - 1 pc



C-00180-143 Turnbuckle - M5 - 92mm -Steel - 2 pcs



C-00180-144 Turnbuckle - M4 - 92mm -Steel - 2 pcs



C-00180-145 Servo Saver Shaft w/ Nut -Aluminium - 1 pc



C-00180-147 Servo Saver Post - Steel - 2 pcs



C-00180-148 Shock Screw - Steel - 4 pcs



C-00180-149 Ball - 5.8mm - Steel - 4 pcs



C-00180-150 Ball Shouldered - 6.8mm - Steel - 4 pcs



C-00180-153-1 Diff. Outdrive Cup - Steel -2 pcs



C-00180-154-1 Center Diff. Outdrive Cup - Steel - 2 pcs



C-00180-155-1 Pinion Outdrive Cup - Steel -2 pcs



C-00180-156 Bevel Pinion 13T - Steel - 1 pc



C-00180-164 Shock Shaft - 66mm - Rear -Steel - 2 pcs



C-00180-166 Shock Shaft - 61mm - Front -Steel - 2 pcs




C-00180-168 Shock Tower - 4mm - Aluminium - Front - 1 pc



C-00180-373 Shock Tower - 5mm - Aluminium - Rear - 1 pc



C-00180-170 Ball - 6.8mm - Steel - 2 pcs



C-00180-171 Threaded Ball - 6mm - Steel -2 pcs



C-00180-175 Steering Rack - Aluminium 7075 - 1 pc



C-00180-176 Motor Bulkhead - Aluminium - 1 pc



C-00180-177 Motor Mount - Aluminium - 1 pc



C-00180-178 Diff. Bevel Gear 43T - Steel -1 pc




C-00180-179 Planetary Diff. Gears - Steel -1 Set



C-00180-182 O-Ring - Silicone - 5x8mm -5 pcs





C-00180-183 Diff. Gasket - 4 pcs



C-00180-184 Gear Diff. Pin - Steel - 2 pcs



C-00180-186 Chassis Brace Link - Steel - 1 pc



C-00180-188 O-Ring - Silicone - 4x8mm -5 pcs




C-00180-189 Shock Bladders - Silicone -4 pcs



C-00180-190 Shock Washer - 2.5x6x0.5mm -Steel - 10 pcs



C-00180-191 O-Ring - Silicone - 9x12mm - 5 pcs



C-00180-192 O-Ring - Silicone -16.2x19.8mm - 5 pcs



C-00180-193 Drive Shaft - Center - Front -Steel - 1 pc



C-00180-197 Anti-Roll Bar - 2.4mm - Front - 1 pc



C-00180-204 Shim Rings - 6x18x0.2mm -Steel - 10 pcs



C-00180-205 Diff. Outdrive Pin - 2x10mm -Steel - 4 pcs



C-00180-206 Steering Rack Bushing - Steel - 2 pcs



C-00180-207 Steering Block Arms - Aluminium - 2 pcs




C-00180-216 Servo Saver Spring - 1 pc



C-00180-219 Suspension Arm Pivot Pin -Upper - Front - Steel - 2 pcs




C-00180-220 Ball End 5.8mm - for Anti Roll Bar - Steel - 4 pcs



C-00180-223 Centre Drive Shaft - Truggy -Rear - Steel - 1 pc




C-00180-226-B Wing - Composite - 1 pc



C-00180-230 Wheel Nut - Aluminium -Ribbed - 4 pcs



C-00180-231 Collar - for Anti-roll Bar - Aluminium - 1 pc




C-00180-238 Suspension Arm Mount - Rear -Aluminium - 1 set



C-00180-240 Suspension Arm Mount - Front -Aluminium - 1 Set




C-00180-242 Side Guards - Left-Right - Composite - 1 Set




C-00180-246 Anti-Roll Bar - Rear - 2.6mm - 1 pc



C-00180-251 Wing Washer - Composite. -2 pcs



C-00180-287 Shock Spring - Medium - Rear - 2 pcs



C-00180-290 Shock Spring - Medium - Front - 2 pcs



C-00180-293 Ball 6.8mm - Steel - 4 pcs



C-00180-301 Centre Roll Cage Mount - Composite - 1 Set



C-00180-305 Centre Roll Cage Pin - Steel - 2 pcs



C-00180-316 Shock Cap - Lower - Aluminium - 2 pcs



C-00180-322 Suspension Arm Pivot Pin - Lower Inner - Fr/Re - Steel - 2 pcs



C-00180-328 Chassis - Long - Truggy XP RTR - Aluminium - 1 pc



C-00180-329 Wheel Hex Adapter - Wide RTR - Aluminium - 2 pcs





C-00180-004-1 Battery Strap - Hook & Loop - 2 pcs



C-00180-106 Body Post - Front - Composite - 2 pcs



C-00180-341 CVD Drive Shaft - Long - Front -Wide Blocks - 1 pc



C-00180-367 Universal Drive Shaft - Truggy -MTL - Rear - 2 pcs



C-00180-368 Wheel Drive Axle - Truggy - MT - Rear - 1 pc



C-00180-372 Servo Arm - Aluminium - 1 pc



C-00180-378 MT - Racing Tires Glued on Rims - 2 pcs



C-00180-379 Painted Body - MT KRONOS RTR - 1 pc



C-52021 Digital Servo - CR-7220-MG - Low Voltage - Core Motor -Metal Gear - 20 Kg Torque



C-54011 Speed Controller - TOROX 185 -Brushless - 2-6S



C-54055 Electric Motor – Kuron 825 -4-Pole - 2050 KV – Brushless - Sensorless




C-72713 M1.0 Pinion - Hardened Steel




13 Teeth - Shaft Dia. 5mm




C-3611-4-08-16-05 Ball Bearing - Abec 3 8x16x5mm - 2 pcs



C-3201-60 Steel Shim - M6 - 10 pcs



C-31205 Aluminium Washer - for M3 Flat Head Screws - Red - 10 pcs



C-3104-40 Steel Nut - Low Profile - M4 -10 pcs



C-3611-2-06-10-03

Ball Bearing - Abec 3


M2.5x10 C-3001-25-10

| C-3001-25-20 | M2.5x20 |
|--------------|---------|
| C-3001-30-06 | M3x6 |
| C-3001-30-08 | M3x8 |
| C-3001-30-10 | M3x10 |
| C-3001-30-12 | M3x12 |
| C-3001-30-14 | M3x14 |
| C-3001-30-16 | M3x16 |
| C-3001-30-20 | M3x20 |
| C-3001-30-25 | M3x25 |
| C-3001-30-30 | M3x30 |
| C-3001-40-08 | M4x8 |




FLAT HEAD SCREWS - 10 PCS

| C-3002-30-08 | M3x8 |
|--------------|-------|
| C-3002-30-10 | M3x10 |
| C-3002-40-10 | M4X10 |
| C-3002-40-12 | M4x12 |
| C-3002-40-14 | M4x14 |
| C-3002-40-16 | M4x16 |
| C-3002-40-18 | M4x18 |




BUTTON HEAD SCREWS - 10 PCS

| C-3003-30-06 | M3x6 |
|--------------|-------|
| C-3003-30-10 | M3x10 |
| C-3003-30-12 | M3x12 |
| C-3003-30-16 | M3x16 |
| C-3003-40-12 | M4x12 |



SET SCREWS - 10 PCS

C-3004-30-03 C-3004-30-05 M3x5 M4x4 C-3004-40-04




NYLSTOP NUT - 10 PCS C-31001-25 M2.5 C-31001-30 М3 C-31001-40 M4



www.corally.com


OPTION PARTS



C-00180-157 Wing Washer - Lightened -Aluminum - 2 pcs




C-00180-224 Fan Holder - Composite - 1 set




C-00180-195

C-00180-232 Suspension arm stiffener - A -Lower Front - Right - 1 pc




Anti-Roll Bar - 2.6mm - Front



Anti-Roll Bar - 2.5mm - Front

C-00180-196


C-00180-233 Suspension arm stiffener - A -Lower Front - Left - 1 pc



C-00180-247 Anti-Roll Bar - Rear - 2.8mm



C-00180-198 Anti-Roll Bar - 2.2mm - Front



C-00180-234 Suspension arm stiffener - B -Lower Front - Right - 1 pc



C-00180-199

Graphite 3mm


- 1 pc

Anti-Roll Bar - 2.0mm - Front

Suspension arm stiffener - B -Lower Front - Left - 1 pc




Suspension arm stiffener - Rear - Right - 1 pc




C-00180-237 Suspension arm stiffener - Rear - Left - 1 pc






C-00180-248 Anti-Roll Bar - Rear - 3.0mm




C-00180-249 Anti-Roll Bar - Rear - 2.4mm



C-00180-255 Chassis Brace Stiffener - Front - Graphite 2.5mm - 2 pcs



C-00180-256 Chassis Brace Stiffener - Rear -Graphite 2.5mm - 2 pcs




C-00180-257 Shock Stay Stiffener - Rear -Graphite 2.5mm - 2 pcs



C-00180-266 Servo Saver Steering Arm -Aluminium - 1 pc



C-00180-272 Suspension arm stiffener - A -Lower Front - Right - 1 pc




C-00180-273 Suspension arm stiffener - A -Lower Front - Left - 1 pc




C-00180-274 Suspension arm stiffener - B -Lower Front - Right - 1 pc




C-00180-275 Suspension arm stiffener - B -Lower Front - Left - 1 pc




C-00180-284 Wheel Nut - Closed - Aluminium




C-00180-286 Shock Spring - Soft - Rear



C-00180-288 Shock Spring - Hard - Rear - 2 pcs



C-00180-289 Shock Spring - Soft - Front - 2 pcs



C-00180-291 Shock Spring - Hard - Front - 2 pcs



C-00180-294 Wheelie Bar - Complete Set




C-00180-308 Wheelie Bar Plate - Graphite - 1 pc



C-00180-315 Steering Block Arms - Graphite 2.5mm - 2 pcs



C-00180-346 CVD Drive Shaft - Long - Rear -Wide Blocks - 1 pc



C-00180-380 Clear Body - KRONOS Monster Truck - 1 pc



C-00180-384 Polycarbonate Body - Shogun XP 6S - Painted - Cut - 1 pc



C-72714 M1.0 Pinion - Hardened Steel 14 Teeth - Shaft Dia, 5mm



DECLARATION OF CONFORMITY

EU-Konformitätserklärung/ Déclaration de Conformité UE

(in accordance with ISO/IEC 17050-1) / (in Übereinstimmung mit ISO/IEC 17050-1) / (Conformément à la norme ISO/IEC 17050-1)

Description: KRONOS MONSTER TRUCK 4WD - RTR - 1/8 SCALE

Item Number: C-00170

This declaration is issued under the sole responsibility of the manufacturer. Die alleinige Verantwortung für die Ausstellung dieser Erklärung trägt der Hersteller. La présente déclaration est établie sous la seule responsabilité du fabricant.

Product(s)/Produkt(e)/ Produit(s): 1/8 SCALE - MONTER TRUCK KRONOS - 4WD - RTR

The object of declaration described above is in conformity with the relevant Union harmonization Legislation, specifically the requirements of the specifications listed below, following the provisions of the European RED Directive 2014/53/EU: Der Gegenstand dieser Erklärung ist konform mit den Harmonisierungsrechtsvorschriften der Europäischen Union, insbesondere mit den unten aufgeführten Bestimmungen, und folgt der europäischen RED Direktive 2014/53/EU:

L'objet de la déclaration décrit ci-dessus est conforme à la législation pertinente en matière d'harmonisation de l'Union européenne, en particulier les exigences des spécifications énumérées ci-dessous, conformément aux dispositions des directives européennes RED 2014/53/EU:

EN 300 440 V2.1.1:2017 EN 301 489-3 V1.6.1:2013

EN 301 489-1 V2.1.1:2017 EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

EN 62479:2010 EN 55024:2010+A1:2015 EN 55032:2015 EN 61000-3-3:2013

EN 61000-3-2:2014

JSP GROUP INTL • Geelseweg, 80 • 2250 Olen • Belgium

Signed for and on behalf of/ Unterzeichnet für und im Namen von/ Signé pour et au nom de :

Place/Ort/Lieu and Date/Datum/Data: Olen, Belgium, 24 June 2019

Name/Nom: **Stefan Engelen** Signature/Unterschrift :

 $\label{title} \mbox{Title/Titel/Titre}: \textbf{Ceo}$





FEDERAL COMMUNICATIONS COMMISSION

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE **JSP GROUP INTL BVBA / CORALLY**, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

FCC IDENTIFIER: 2ASZJ-VP010005

Name of Grantee : JSP GROUP INTL BVBA / CORALLY

Equipment Class: Part 15 Low Power Communication Device Transmitter

Notes: VARIOPROP S2R

FCC Rules: 15C

Frequency Range (MHZ): 2410.0 - 2480.0





WWW.CORALLY.COM