

Wingspan: ---- 1500mm (59in) Overall Length: ---- 1126mm (44.3in) Wing Area: ---- 34dm2 Wing Loading: ---- 72g/dm²

Flying Weight: ---- 2450g Servo: ----- 9a\*9 17a\*1

ESC: ---- Skylord-40A\*2 Motor: ---- BM3512A-KV650\*2 **Brushless Motor** Battery: ----- 14.8V 4000mAh 25C

P61-10 Plastic Parts Set

P61-15 Push Rod

DY-1152 New Ø3.6 90° DY-6016 14.8V 4000mAh E-retract 25C Li-Po Battery

Propeller: ---- 10.5\*8 4-blade\*2 Transmitter: ---- 2.4G 6CH+


P61-09 Canopy and

P61-03 Outer Wing Set P61-04 Horizontal Stabilizer

P61-13 Nose Retract, Strut P61-14 Servo Horns and

P61-08 Cockpit and

### **SPARE PART LIST:**



P61-01 Fuselage






P61-11 Motor Mount Firewall P61-12 Main Gear Strut



P61-16 Decal Set




P61-21 Propeller

DY-3003 Glue









DTM-R004 RXC6 6CH 2.4G



**7** Secure the wing to the fuselage with PM 3X50 screws.

DTM-T006 GAVIN-6A Transmitter




DTM-C001 Supermate 4 Balance Charger



DY-1009 17g Servo

US/EU/UK/AU Adapter

Fix the 10.5X8 propeller with the M8 right propeller adapter.

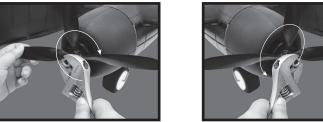

DY-1007 9g Servo


DTM-A001/A002/A003/A004 DTM-1004 Detrum Radio DY-3009 Battery Velcro Strap

Neck Strap


9 10.5X8R Fix the 10.5X8R propeller with the M8 left propeller adapter.

for B26/P61(Twin 40A)

# **DIRECTIONS FOR ASSEMBLY AND ADJUSTMENT**

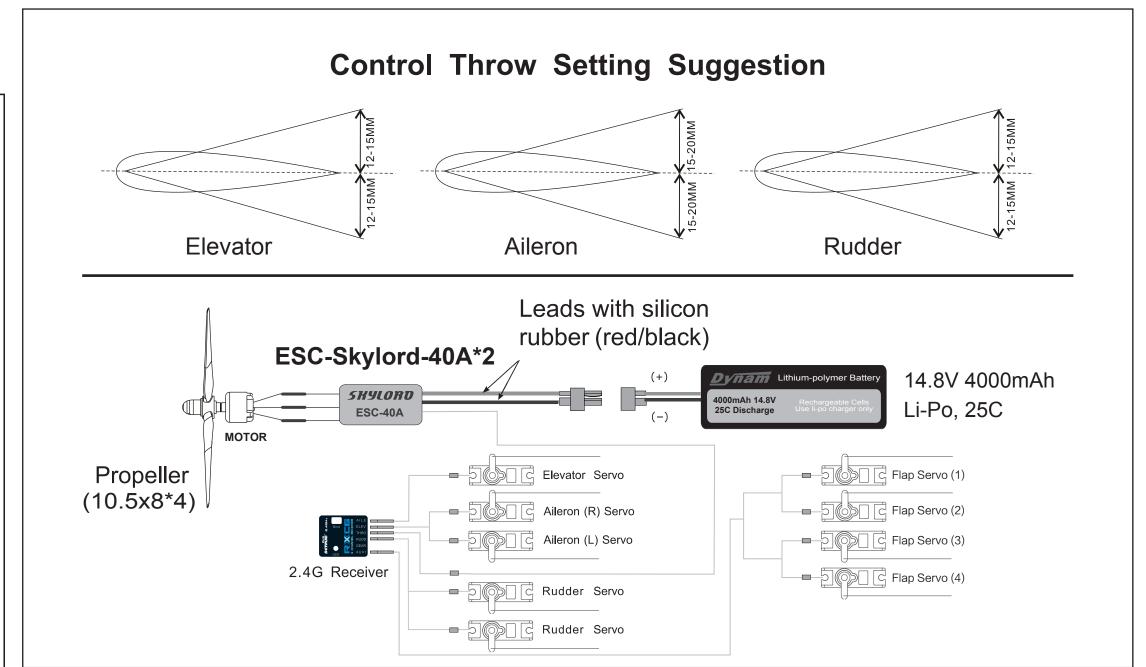

### **ASSEMBLY:**



vertical stabilizer by using the glue.

1 Install the horizontal stabilizer and



4 Connect the cables between



aileron servo and flap servo.

10 Secure the spinner with PA 3X12 screws.

• The product is not intended for those under 14 years of

age without proper adult supervision. The product is not

a toy. It is a precision machine requiring proper assembly

and setup to avoid accidents and it is the responsibility of

the owner to operate this product in a safe manner as it can

cause serious personal injury and damage to property due

• The spinning rotors on this product can be dangerous!

When operating/flying, always be aware of the spinning rotors. Be careful not to let them come close to your body,

other people or loose clothing. Keep your hands, fingers

• Do not attempt to disassemble or modify any of the

• Only use the correct type of battery to operate. Using

• The motor(s) may get hot during use. Always allow 10-15

• Choose an appropriate operating site consisting of flat,

smooth ground, and clear open field. Do not operate near

RC models are prone to accidents, failures, and crashes

their actions and damage or injury occurring during the

• The product is composed of precision electrical

components. It is critical to keep the product away from

moisture and other contaminants. Do not allow them to

get wet. Electrical damage may occur that could affect

due to a variety of reasons including, lack of maintenance,

• Do not operate in inclement weather, such as rain, wind,

pilot error, and radio interference. Pilots are responsible for

buildings, high voltage cable lines, or trees to ensure safety

operation. Operate in safe area only, away from other people

minutes between each flight for the motor to cool down. This

any wrong type of battery will damage the product and


and any articles of clothing away from the rotors.

product components without the assistance of an

possibly make it dangerous to operate

will prolong the life of your product.

experienced RC user.



2 Connect the servo with wire, and put the connector into hole Fix the vertical stabilizer with glue



5 Secure the wing with PA 2.5X15 screws.


11 Secure the spinner with


PA 3X12 screws.



6 Glue the canopy to fix it.

3 Connect the LED cables.

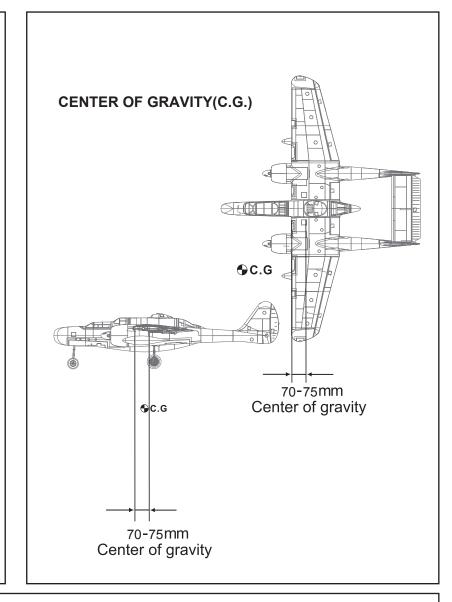

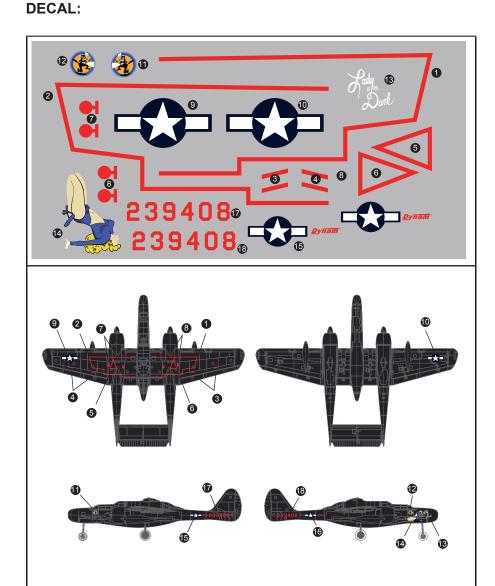

# **WARNINGS**

• After each use, always allow the battery to cool down before recharging. When charging the battery pack, do not overcharge! If batteries get hot during charging, discontinue charging immediately and disconnect the battery from the charger. Never leave battery unattended while charging. If you are unsure of how to charge this battery, please seek the advice of experienced RC users. Never let children charge

 Always turn on the transmitter before connecting the battery on the model. When turning off the model, always disconnect the battery first, and then turn off the transmitter. If the order is reversed, the model may become uncontrollable

the battery without adult supervision.

• If you are in doubt of your ability to operate the model, we strongly recommend that you seek assistance from experienced RC users or join your local model flying club to gain the required knowledge and skill. As the manufacturer and distributor, we assume no liability for the use

• Before turning on your model and transmitter, please check to make sure no one else is operating under the same frequency. Frequency interference can cause your model or other's models to crash. The guidance provided by experienced RC users will be valuable for the assembly, tuning, trimming, and actual first flight.

• Never allow batteries to run low or you might lose control of

 You should complete a successful pre-flight check of your radio equipment and model prior to each flight

 Plastic is very susceptible to damage or deformation due to extreme heat and cold climate. Do not store the model near any source of heat such as oven or heater. Store the model indoors, in a climate-controlled, room temperature

Dynam RC guarantees this product to be free of manufacturing faults and material defects. This product has been checked and fine tuned individually by professional pilot and quality control pilot. The warranty does not cover any component parts damaged by use and modification. Please visit http://www.dynam-rc.cn for updated product information

This product is not a toy. It is not recommended for children under 14 years old and any minor should be accompanied by an adult when operating. This product is a precision machine that requires proper assembly and setup to avoid accidents. Failure to take caution when operating this product may result in serious injury or property damage. It is the owner's responsibility to operate this product in a safe manner. Manufacturer and its distributors are not responsible in any way for any and all bodily injury(s) and/or property damage that may occur from the use of or caused by in any way of this product. This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Please recycle.

## Charge the Li-Po battery pack

Disconnect the battery from the charger when the charging process completed. Do not charge the battery unattended at all time.

## Lithium Polymer (LiPo) Battery Warnings

- Never charge a lithium polymer battery with a charger designed for NiCd, NiMH, or any other type of battery chemistry. Use ONLY charger designed for LiPo battery.
- Do not leave LiPo battery unattended during charging.
- Do not overcharge the battery.
- Always put the LiPo battery inside a charging protection container while charging.
- Do not allow LiPo cells to overheat at any time. Cells which reach greater than 140 Fahrenheit (60°C) will usually become damaged and will catch fire. • Do not allow LiPo cells on or near combustible materials including paper, plastic, carpets,
- vinyl, leather, and wood, inside an R/C model or full size automobile.
- Do not over discharge LiPo; doing so will damage the battery.
- Do not expose LiPo cell to water or moisture at any time.
- Do not store battery near open flame or heater.
- Do not assemble LiPo cells or pre-assembled packs together with other LiPo cells or packs. • Always store LiPo battery in a secure location away from children.
- Always remove the LiPo battery if model is involved in any kind of crash. Carefully inspect the battery and connectors for even the smallest damage. CAUTION: cells may be hot!
- Do not allow the electrolyte to get into eyes or on skin. Wash affected areas immediately if they come into contact with electrolyte. Do not alter or modify connectors or wires of a
- LiPo battery pack. Always inspect the condition of the battery before charging and operationg.
- Do not short circuit the LiPo battery.
- Do not have contact with a leaky/damaged battery directly.
- Do not charge battery out of recommended temperature rang (0°C-45°C)